



**Wavelink Telnet Client  
Industrial Browser  
Reference Guide**

tn-rg-browser-20070821

*Revised 08/21/07*

Copyright © 2007 by Wavelink Corporation All rights reserved.

Wavelink Corporation  
6985 South Union Park Avenue, Suite 335  
Midvale, Utah 84047  
Telephone: (801) 316-9000  
Fax: (801) 316-9099  
Email: [customerservice@wavelink.com](mailto:customerservice@wavelink.com)  
Website: <http://www.wavelink.com>

Email: [sales@wavelink.com](mailto:sales@wavelink.com)

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, without permission in writing from Wavelink Corporation. This includes electronic or mechanical means, such as photocopying, recording, or information storage and retrieval systems. The material in this manual is subject to change without notice.

The software is provided strictly on an “as is” basis. All software, including firmware, furnished to the user is on a licensed basis. Wavelink grants to the user a non-transferable and non-exclusive license to use each software or firmware program delivered hereunder (licensed program). Except as noted below, such license may not be assigned, sublicensed, or otherwise transferred by the user without prior written consent of Wavelink. No right to copy a licensed program in whole or in part is granted, except as permitted under copyright law. The user shall not modify, merge, or incorporate any form or portion of a licensed program with other program material, create a derivative work from a licensed program, or use a licensed program in a network without written permission from Wavelink. The user agrees to maintain Wavelink’s copyright notice on the licensed programs delivered hereunder, and to include the same on any authorized copies it makes, in whole or in part. The user agrees not to decompile, disassemble, decode, or reverse engineer any licensed program delivered to the user or any portion thereof.

Wavelink reserves the right to make changes to any software or product to improve reliability, function, or design.

The information in this document is bound by the terms of the end user license agreement.

# Table of Contents

<b>Chapter 1: Introduction</b>	<b>3</b>
Document Assumptions .....	3
Document Conventions .....	3
About the Telnet Client Industrial Browser.....	4
Licensing .....	5
<b>Chapter 2: Configuring Host Profile and Emulation Parameters</b>	<b>7</b>
Configuring the Industrial Browser Host Profile .....	7
HTTP Proxy Tab .....	8
HTTPS Proxy Tab .....	10
Access List Tab .....	11
Configuration Tab .....	13
Configuring WEB Emulation Parameters .....	14
<b>Chapter 3: Using the Industrial Browser</b>	<b>17</b>
Basic Navigation .....	17
Specifying the Home Page .....	18
Using the WEB Virtual Emulation Keyboard .....	18
<b>Chapter 4: Developing Web Pages for the Industrial Browser</b>	<b>21</b>
META Tags.....	21
BatteryNavigate .....	22
OnAllKeys, OnKey..., OnKey0x....	23
OnStartup, IDA .....	23
PowerOn .....	23
Printing .....	24
Scanner .....	25
ScannerNavigate, ScannerProcessed .....	26
SignalNavigate .....	26
SpeechFromText .....	26
SpeechSetting .....	27
TextFromSpeech .....	27
Symbologies .....	27
Element-Specific Actions .....	28
IDA Commands.....	29
IDA_COLDBOOT .....	32
IDA_COLDBOOT_PROMPT .....	32
IDA_KEYBOARD_WEB, IDA_KEYBOARD_SHOW, or IDA_KEYBOARD_UP	32
IDA_KEYBOARD_NUM or IDA_KEYBOARD_NUMERIC .....	32
IDA_KEYBOARD_NONE, IDA_KEYBOARD_HIDE, or IDA_KEYBOARD_DOWN	32
IDA_PROGRAM_EXIT .....	32

IDA_PROGRAM_EXIT_PROMPT .....	33
IDA_REPRINT .....	33
IDA_SESSION_S1, IDA_SESSION_S2, IDA_SESSION_S3, IDA_SESSION_S4	33
IDA_SCAN_DISABLE or IDA_SCAN_SUSPEND .....	33
IDA_SCAN_ENABLE or IDA_SCAN_RESUME .....	33
IDA_SCAN_FORWARD .....	33
IDA_SESSION_DISCONNECT .....	33
IDA_SESSION_DISCONNECT_PROMPT .....	34
IDA_SESSION_NEXT .....	34
IDA_SESSION_PREVIOUS .....	34
IDA_SIP_SHOW or IDA_SIP_UP .....	34
IDA_SIP_HIDE or IDA_SIP_DOWN .....	34
IDA_SIP_TOGGLE or IDA_SIP_TOGGLEHIDE .....	34
IDA_SUSPEND or IDA_SUSPEND_DEVICE .....	34
IDA_SUSPEND_PROMPT .....	34
IDA_URL_BACK or IDA_BACK .....	34
IDA_URL_BACK_DISABLE or IDA_BACK_DISABLE .....	35
IDA_URL_BACK_ENABLE or IDA_BACK_ENABLE .....	35
IDA_URL_FORWARD or IDA_FORWARD .....	35
IDA_URL_FORWARD_DISABLE or IDA_FORWARD_DISABLE ..	35
IDA_URL_FORWARD_ENABLE or IDA_FORWARD_ENABLE ..	35
IDA_URL_HOME or IDA_HOME .....	35
IDA_URL_HOME_DISABLE or IDA_HOME_DISABLE .....	36
IDA_URL_HOME_ENABLE or IDA_HOME_ENABLE .....	36
IDA_URL_REFRESH or IDA_REFRESH .....	36
IDA_URL_STOP or IDA_STOP .....	36
IDA_WARMBOOT .....	36
IDA_WARMBOOT_PROMPT .....	36
IDA_ZOOM_DISABLE or IDA_FONT_DISABLE .....	36
IDA_ZOOM_ENABLE or IDA_FONT_ENABLE .....	37
IDA_ZOOM_LARGER or IDA_FONT_LARGER .....	37
IDA_ZOOM_LARGEST or IDA_FONT_LARGEST .....	37
IDA_ZOOM_MEDIUM or IDA_FONT_MEDIUM .....	37
IDA_ZOOM_MINUS or IDA_FONT_MINUS .....	37
IDA_ZOOM_PLUS or IDA_FONT_PLUS .....	38
IDA_ZOOM_SMALLER or IDA_FONT_SMALLER .....	38
IDA_ZOOM_SMALLEST or IDA_FONT_SMALLEST .....	38

**Appendix A: Wavelink Contact Information** **39**

**Index** **41**

# Chapter 1: Introduction

This document provides information about using and developing for the Telnet Client Industrial Browser.

This section provides the following information:

- Document Assumptions
- Document Conventions
- About the Telnet Client Industrial Browser

## Document Assumptions

This document assumes that the reader has the following:

- Knowledge of wireless networks and wireless networking protocols.
- Knowledge of TCP/IP, including IP addressing, subnet masks, routing, BootP/DHCP, WINS, and DNS.
- Knowledge of Wavelink Telnet Client.
- Knowledge of web page development, including implementation of META tags and IDA commands.

## Document Conventions

The following section contains information about text-formatting conventions in this manual.

Table 1-1 lists the conventions that are used in this manual.

Convention	Description
<i>courier new</i>	<p>Any time you interact directly with text-based user interface options, such as a button, or type specific information into an text box, such as a file pathname, that option appears in the <i>Courier New</i> text style. This text style is also used for keys that you press, filenames, directory locations, and status information.</p> <p>For example:</p> <p>Press <code>ENTER</code>.</p> <p>Click <code>OK</code>.</p>
<b>bold</b>	<p>Any time this document refers to a labelled user interface option, such as descriptions of the choices in a dialog box, that option appears in the <b>Bold</b> text style.</p> <p>Examples:</p> <p>Enable the <b>DHCP</b> checkbox.</p> <p>Access the TelnetCE Client <b>Session</b> menu.</p>
<i>italics</i>	<p>Italicized text is used to indicate the name of a window or dialog box.</p> <p>For example:</p> <p>The <i>Update Utility</i> dialog box.</p> <p>The <i>Profile Manager</i> dialog box.</p>

**Table 1-1:** *Text-Formatting Conventions*

## About the Telnet Client Industrial Browser

Wavelink Telnet Client includes an Industrial Browser interface that gives you the ability to access web-based applications from a mobile device. The Industrial Browser supports PocketPC 2003, Windows Mobile 5.0, Windows 2000/XP, and Windows CE .NET 4.2/5.0.

---

**NOTE** The Industrial Browser is included in Telnet Client 6.0 and later versions.

---

## Licensing

The Telnet Client Industrial Browser requires a license for full functionality. You can use the Telnet Client Industrial Browser without a license, but you will be limited to the demo version, which does not provide full Telnet Client functionality.

There are two ways to license Telnet Client Industrial Browser:

- If you do not currently have a Telnet Maintenance license, you can purchase a Telnet Client 6.0 Standalone Browser license. (A separate Browser Maintenance license is also available.)
- If you currently have a Telnet Maintenance license, you can purchase an Industrial Browser add-on license. (Browser Maintenance is included.)

---

**NOTE** To obtain Telnet Client licenses, please contact Wavelink Customer Service. *Appendix A: Wavelink Contact Information* on page 39 provides Wavelink contact information.

---





## Chapter 2: Configuring Host Profile and Emulation Parameters

This chapter provides information about the following:

- Configuring the Industrial Browser Host Profile
- Configuring WEB Emulation Parameters

### Configuring the Industrial Browser Host Profile

Before you can use the Industrial Browser, you must create a Host Profile for WEB emulation. A Host Profile defines the parameters that the Telnet Client should use when it attempts to initiate a Telnet connection with a specific host.

You may configure as many WEB emulation Host Profiles for the Telnet Client as you wish.

---

**NOTE** For more information about creating Host Profiles, refer to the *Telnet Client User's Guide*.

---

#### To create a Host Profile:

- 1 Access the *Edit Host Profiles* dialog box.
- 2 From the **Type** drop-down menu, select `WEB`.
- 3 Enter the host **Name** and **Address** in the appropriate text boxes and click `OK`.


---

**NOTE** You may enter a subnet-specific address rather than an IP address or a DNS name. For more information, refer to *Wavelink Telnet Client User Guide*.

---

The WEB emulation Host Profile is created.

When you configure the Host Profile for WEB-type emulation, various tabs appear offering different options for WEB settings.

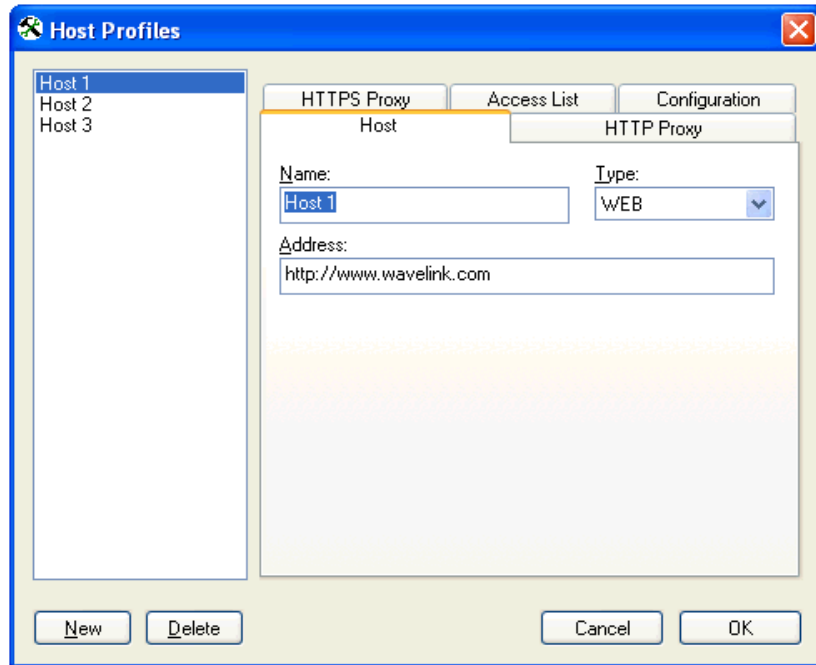


**Figure 2-1.** *Configuring WEB Settings*

The following sections describe the parameters of each tab used to configure WEB emulation settings in the *Host Profiles* dialog box.

### **HTTP Proxy Tab**

Use the HTTP Proxy tab to configure proxy connections for WEB emulation.

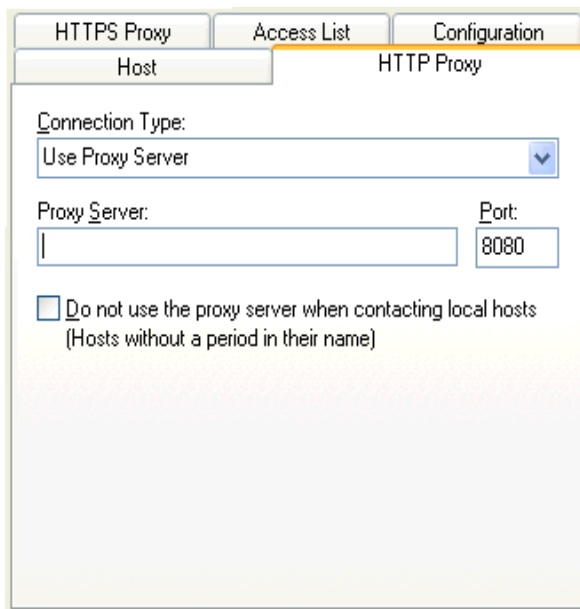

**Figure 2-2.** *Configuring the HTTP Proxy Tab*


The following list describes the options and configurable parameters in the HTTP Proxy tab.

- |                        |   |
|------------------------|---|
| <b>Connection Type</b> | Indicates the type of connection for the Host Profile to use.<br><br><b>Possible Values:</b> <Direct Connection> <Use Explorer Default> <Use Proxy Server><br><br><b>Default Value:</b> <Direct Connection> |
| <b>Proxy Server</b>    | Indicates the location of the proxy server.<br><br><b>Possible Values:</b> Any valid IP address, host name, or web address.<br><br><b>Default Value:</b> <None>   |

- Port** Indicates the network port for the proxy server.  
**Possible Values:** Any valid port number.  
**Default Value:** <8080>
- Do not use the proxy server when contacting local hosts** Indicates whether the Telnet Client should use the proxy server when contacting hosts that reside on the same network.  
**Possible Values:** <Enabled> <Disabled>  
**Default Value:** <Disabled>

## HTTPS Proxy Tab

Use the HTTPS Proxy tab to configure secure proxy connections for WEB emulation.

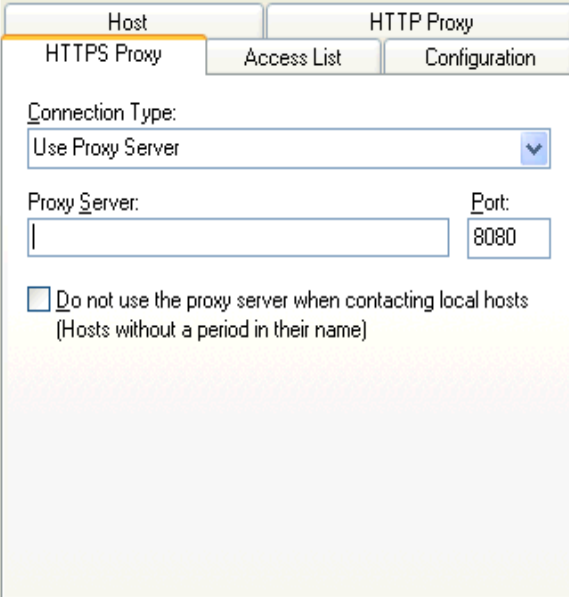

The image shows a configuration window with two main tabs: "Host" and "HTTP Proxy". The "Host" tab is selected and contains three sub-tabs: "HTTPS Proxy", "Access List", and "Configuration". The "HTTPS Proxy" sub-tab is active. The configuration area includes a "Connection Type:" dropdown menu set to "Use Proxy Server". Below this are two input fields: "Proxy Server:" (empty) and "Port:" (set to "8080"). At the bottom, there is a checkbox labeled "Do not use the proxy server when contacting local hosts (Hosts without a period in their name)", which is currently unchecked.


**Figure 2-3.** Configuring the HTTPS Proxy Tab

The following list describes the options and configurable parameters in the HTTPS Proxy tab.

<b>Connection Type</b>	Indicates the type of connection for the Host Profile to use.  <b>Possible Values:</b> <Direct Connection> <Use Explorer Default> <Use Proxy Server>  <b>Default Value:</b> <Direct Connection>
<b>Proxy Server</b>	Indicates the location of the proxy server  <b>Possible Values:</b> Any valid IP address, host name, or web address.  <b>Default Value:</b> <None>
<b>Port</b>	Indicates the network port for the proxy server.  <b>Possible Values:</b> Any valid port number.  <b>Default Value:</b> <8080>
<b>Do not use the proxy server when contacting local hosts</b>	Indicates whether the Telnet Client should use the proxy server when contacting hosts that reside on the same network.  <b>Possible Values:</b> <Enabled> <Disabled>  <b>Default Value:</b> <Disabled>

### **Access List Tab**

Use the Access List tab to configure which web addresses can be accessed by the Telnet Client Industrial Browser.

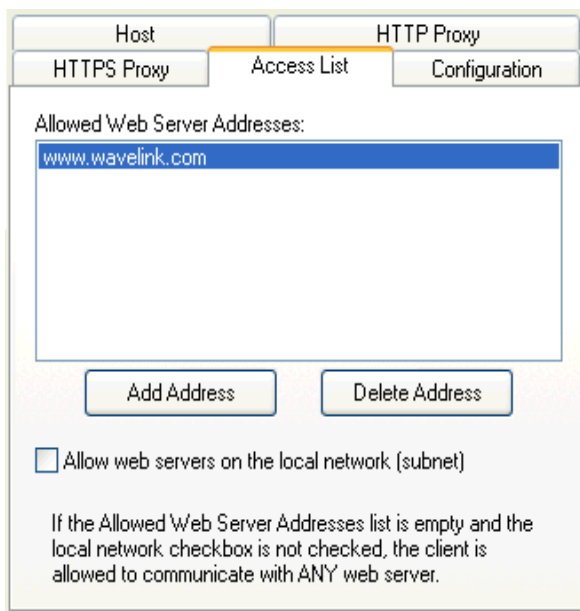

**Figure 2-4.** *Configuring the Access List Tab*


The following list describes the options and configurable parameters in the Access List tab.

<b>Allowed Web Server Addresses</b>	Lists the web addresses that the Telnet Client is permitted to connect with.  <b>Possible Values:</b> Any valid IP address, host name, or web address.  <b>Default Value:</b> <None>
<b>Allow web servers on the local network (subnet)</b>	Indicates whether the Telnet Client can connect with any web server or only with servers on the local network.  <b>Possible Values:</b> <Enabled> <Disabled>  <b>Default Value:</b> <Disabled>

- Add Address** Select this button to add a new IP or web address to the list of addresses that Telnet Client is permitted to connect with.
- Delete Address** Select this button to delete any address in the list.

## Configuration Tab

Use the Configuration tab to modify emulation parameters for the Host Profile.

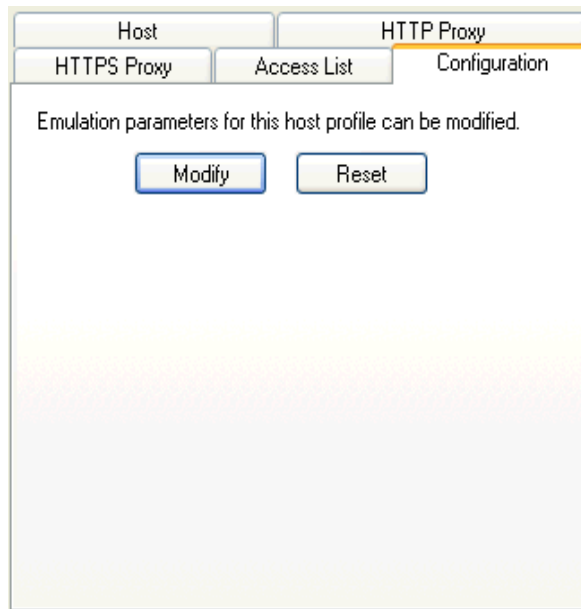

**Figure 2-5.** Configuration Tab

Select `Modify` to access the Configuration Manager or `Reset` to restore default settings.

---

**NOTE** For more information about emulation parameters, refer to *Configuring WEB Emulation Parameters* on page 14

---

## Configuring WEB Emulation Parameters

You can manually configure certain Telnet Client emulation parameters on a per-host basis.

---

**NOTE** For more information on configuring Emulation Parameters, see the *Telnet Client User's Guide*.

---

You can configure parameters for WEB emulation from the WEB tab in the in the *Settings* dialog box. You can also configure parameters by accessing the Configuration Manager from the Configuration tab in the Host Profile.

The following table describes the configurable options in the WEB tab.

<b>WEB Default Scanner Auto Keys</b>	Determines the default post-scan action for web pages without Tab or Enter key META tags  <b>Possible Values:</b> <No Keys> <Enter> <Tab> <Enter and Tab>  <b>Default:</b> <No Keys>
<b>WEB Default Scanner State</b>	Determines the default scanner state for web pages without scanner enabled/disabled META tags.  <b>Possible Values:</b> <Enabled> <Disabled> <Do Not Change>  <b>Default:</b> <Enabled>
<b>WEB Detect Out-Of-Range</b>	Indicates whether Telnet will prevent the user from interacting with a web page if the Wireless LAN adapter is not associated with an access point.  <b>Possible Values:</b> <Enabled> <Disabled>  <b>Default:</b> <Enabled>



- WEB Display Images** Determines if embedded images and/or placeholders should be displayed on web pages.
- Possible Values:** <Enabled> <Disabled>
- Default:** <Enabled>
- WEB HTTP Version for Direct Connections** Determines if the HTTP 1.0 or HTTP 1.1 protocol should be used for direct (non-proxy) connections.
- Possible Values:** <HTTP 1.0> <HTTP 1.1>
- Default:** <HTTP 1.1>
- WEB HTTP Version for Proxy Connections** Determines if the HTTP 1.0 or HTTP 1.1 protocol should be used through proxy connections.
- Possible Values:** <HTTP 1.0> <HTTP 1.1>
- Default:** <HTTP 1.0>
- WEB Out-Of-Range Message** Allows you to customize the out-of-range message that is displayed on the mobile device.
- Possible Values:** <Any>
- Default Message:** <Network Out Of Range>
- WEB Play Background Sounds** Determines whether sounds embedded in the web page will be played.
- Possible Values:** <No> <Yes>
- Default:** <Yes>

---

**NOTE** Sounds will only be played if supported by the mobile device sound card.

---

**WEB Underline Links** Determines if links (anchors) on the web page will be underlined.

**Possible Values:** <No> <Yes>

**Default:** <Yes>

---

**NOTE** This is not supported on Pocket PC and Windows Mobile devices.

---

**WEB User Agent** Specifies the value that is included with the HTTP header information sent by the device to the web server.

**Possible Values:** Any valid User Agent value.

**Default:** <The value that Internet Explorer or Pocket Internet Explorer would use on the device>

## Chapter 3: Using the Industrial Browser

This chapter provides information about using the Telnet Client Industrial Browser, including the following:

- Basic Navigation
- Specifying the Home Page
- Using the WEB Virtual Emulation Keyboard

### Basic Navigation

The Telnet Client Industrial Browser interface provides basic commands for navigating web pages.

#### To navigate within the Industrial Browser:

- 1 Connect to a WEB emulation session.
- 2 Tap and hold on the screen.

A menu appears.

- 3 From this menu, you can select from the following options:

<b>Back</b>	Returns the browser to the previous web page.
<b>Forward</b>	Returns to the screen displayed before <code>Back</code> was selected.
<b>Stop</b>	Stops the web page from loading.
<b>Refresh</b>	Reloads the current web page.

- Home** Returns the browser to the specified home page.
- Text Size** Displays a menu with the following text size options:
- Largest
  - Larger
  - Medium
  - Smaller
  - Smallest

## Specifying the Home Page

The home page is the first page users will see when connecting to the Industrial Browser; it is also the page users will be returned to when they select `Home`. The home page will be the location you set up in the Host Profile for WEB emulation. This can either be an IP address or a specific web address. Refer to *Configuring the Industrial Browser Host Profile* on page 7 for more information.

## Using the WEB Virtual Emulation Keyboard

The Telnet Client Industrial Browser contains a default emulation keyboard. You can access the keyboard through the Telnet Client **Options** menu.

Figure 3-1 shows the Telnet Client virtual emulation keyboard for WEB emulation.

Back	Fwd	Stop	Refresh	Home
Prev Sess		Next Sess		Close
Key Clicks		Quiet	Info	Diags
Alpha	Num	Func	Punc	Cfg
		Off	←	→
			↑	↓

**Figure 3-1.** *Telnet Client WEB Virtual Emulation Keyboard*

The following list describes the function of the keys in the WEB virtual emulation keyboard.

<b>Back</b>	Returns the browser to the previous web page.
<b>Fwd</b>	Returns to the screen displayed before <b>Back</b> was selected.
<b>Stop</b>	Stops the web page from loading.
<b>Refresh</b>	Reloads the current web page.
<b>Home</b>	Returns the browser to the specified home page.
<b>Prev Sess</b>	Cycles to the previous Telnet Client session.
<b>Next Sess</b>	Cycles to the next Telnet Client session.
<b>Close</b>	Disconnects the session. (Only available when the session is connected.)
<b>Key Clicks</b>	Turns key clicks on/off
<b>Quiet</b>	Turns quiet mode on/off.
<b>Info</b>	Shows/hides the following information about the mobile device: <ul style="list-style-type: none"><li>• Telnet Client version information</li><li>• MAC address</li><li>• IP address</li><li>• ESSID</li></ul>
<b>Diags</b>	Allows you to access the Telnet Client diagnostic tools.

<b>Alpha</b>	Displays the alpha keys for WEB emulation, including: <ul style="list-style-type: none"><li>• a-z</li><li>• Shift, Ctl, Alt</li><li>• Esc, Tab, Caps, Enter, Space</li></ul>
<b>Num</b>	Displays the numeric keyboard for WEB emulation, including: <ul style="list-style-type: none"><li>• 0-9</li><li>• Shft</li><li>• Esc, Tab, Ins, Enter, Space</li></ul>
<b>Func</b>	Displays the function keys for WEB emulation, including: <ul style="list-style-type: none"><li>• F1-F24</li></ul>
<b>Punc</b>	Displays the punctuation keys for WEB emulation, including: <ul style="list-style-type: none"><li>• Punctuation keys</li><li>• Enter, Space</li></ul>
<b>Cfg</b>	Displays the virtual emulation keyboard.
<b>Off</b>	Hides the virtual keyboard.
<b>Arrow Keys</b>	Moves the web page up and down or from side to side.

## Chapter 4: Developing Web Pages for the Industrial Browser

This chapter provides information about the META tags and IDA commands supported by the Telnet Client Industrial Browser. You can use these tags to develop custom web pages that enable specific functionality in the Industrial Browser. The following sections are included:

- META Tags
- IDA Commands

### META Tags

META tags are included at the top of a web page between the <HEAD> and </HEAD> tags. They are evaluated in the order they appear in the web page (from top to bottom). The Industrial Browser is designed to work only with tags it recognizes; it will ignore tags it does not recognize. If a META tag starts with the `iBrowse_` prefix, that prefix will be ignored. For example, `iBrowse_ScannerNavigate` is the same as `ScannerNavigate`.

Each META tag has the following format:

```
<meta http-equiv="action_name" content="action_type">
```

In the preceding format, the `action_type` can be a URL, an IDA action, or a JavaScript function. Some actions allow the action type to include replacement values; a `%s` or `%d` or `%ld` string can be used to indicate where each replacement item belongs.

---

**NOTE** These strings are interchangeable and can be used in any format that you prefer.

---

You can also use META tags in conjunction with a `"wls:"` type to launch Telnet scripts from a web page. For more information, refer to *Wavelink Telnet Client Scripting Reference Guide*.

The following are META tags supported by the Telnet Client Industrial Browser:

- `BatteryNavigate`

- OnAllKeys, OnKey..., OnKey0x...
- OnStartup, IDA
- PowerOn
- Printing
- Scanner
- ScannerNavigate, ScannerProcessed
- SignalNavigate
- SpeechFromText
- SpeechSetting
- TextFromSpeech
- Symbolologies

## **BatteryNavigate**

The `BatteryNavigate` META tag is used to handle changes in the battery strength or the AC line status. The action occurs when the battery strength changes or when the device is plugged in or unplugged.

The four main arguments (from left to right) are: the AC line status, the strength of the main battery from zero to 100, the strength of the backup battery from zero to 100, and the main battery chemistry. A battery strength of 255 means “unknown”.

The following are the AC line status values:

Offline	00
Online	01
Backup-power	02
Unknown	255

The following are the battery chemistry values:

Alkaline	01
Nicd	02



Nimh	03
Lion	04
Lipoly	05
Zincair	06
Unknown	255

### **OnAllKeys, OnKey..., OnKey0x...**

The `OnKey...` and `OnKey0x...` META tags describe an action that will occur if a particular key is pressed. The key values that are evaluated are the same key values used by Keyboard Creator.

The `OnKey0x` format requires a hexadecimal number, while the `OnKey` format will require a decimal format. The key value is also case sensitive.

For example:

`OnKey50` and `OnKey0x32` will both respond to the 2 key.

`OnKey65` and `OnKey97` would be used to respond to both the upper and lowercase A.

The `OnAllKeys` tag will perform the prescribed action each time a key is pressed. The action type can include one argument, which is the string representing the decimal value of the key.

---

**NOTE** Due to browser limitations, some keys (such as `Tab`) may not always be handled by this tag.

---

### **OnStartup, IDA**

The `OnStartup` and `IDA` META tags allow you to specify actions that will be taken when the web page is first loaded. The action type must be one of the action types described in *IDA Commands* on page 29.

### **PowerOn**

The `PowerOn` META tag is used when the device turns on.

## Printing

You can send data to the printer by including the data in the META tags. Use the `Print_Continue` and `Print_Finish` action names to specify the print data. The print data is in the action type of these META tags. The print data in each META tag should all be on the same line and should not be more than 1024 characters in length; however the total print data can be larger than 1024 characters. In addition to standard characters, you can use the following:

- `\r` to specify a return character
- `\n` to specify a newline character
- `\t` to specify a tab character
- `\\` to specify a backslash character
- `\##` or `\x##` to specify any other character, where `##` is replaced with a two-digit hexadecimal number

`Print_Continue` should be used for all but the last section of print data, and `Print_Finish` should be used for the last section of print data.

---

**NOTE** If desired, the action names `Print_Done`, `Print_Final`, `PLSeriesLabel_Print` and `ZebraLabel_Print` can be used instead of `Print_Finish`.

---

The META tag `Print_Callback` can be used to specify the action that will occur after the printing is completed. The argument will be 0 if the printing was successful, or a non-zero number if the printing failed.

---

**NOTE** If desired, the action names `Print_Complete`, `ZebraLabel_Complete` and `PLSeriesLabel_Complete` can be used instead of `Print_Callback`.

---

The META tag `Print_Setup_TP` can be used to specify the IP Address and port of the printer if using TCP printing. If this tag is used, it must be specified before the `Print_Finish` tag. The format is `address:port`.

For example:

```
<meta http-equiv="Print_Setup_TP"
content="192.168.1.59:7429">

<meta http-equiv="Print_Continue"
content="\22First Line\22\r\n">

<meta http-equiv="Print_Continue"
content="\22Middle\22\r\n">

<meta http-equiv="Print_Finish"
content="\22Last Line\22\r\n">

<meta http-equiv="Print_Callback"
content="printresult.htm&status=%s"
```

## Scanner

If the action name is `Scanner` and the action type is `Enable` or `Resume`, the scanner will be enabled when the page is first loaded. If the action type is `Disable` or `Suspend`, the scanner will be disabled when the page is first loaded.

There are four additional scanner action types supported by Telnet Industrial Browser:

- `AutoTab`
- `AutoEnter`
- `AutoEnterAndTab`
- `NoAuto`

The `AutoTab`, `AutoEnter`, and `AutoEnterAndTab` action types will enable the scanner and will cause the scan data to be followed by an enter or tab key (or both). The `NoAuto` action type will enable the scanner and will clear the scanner key value (if a value is specified by the emulation parameters).

Once enabled or disabled, the scanner will stay in that state until some other action (such as a META tag or IDA action) changes the state or until the user changes sessions.

You can also use WEB Default Scanner Auto Keys and WEB Default Scanner State emulation parameters to configure the default scanner action on web pages with no applicable META tags. For more information on emulation parameters, see *Configuring WEB Emulation Parameters* on page 14

### **ScannerNavigate, ScannerProcessed**

The `ScannerNavigate` META tag is used to handle raw scan data. The `ScannerProcessed` tag is similar, but gives the scan data after it has been modified by the scan handlers, etc. in the Emulation Parameters.

If the action type has zero to three arguments, then the arguments are (from left to right): the barcode data, the symbology type, and the time stamp.

If the action type has four or five arguments, then the arguments are (from left to right): the barcode data, source scanner name, symbology type, time stamp, and barcode length.

---

**NOTE** Refer to the following section for supported symbology types.

---

### **SignalNavigate**

The `SignalNavigate` META tag is used to handle changes in the signal strength of the wireless network connection. The action occurs when the signal strength changes or when the device disconnects from the wireless network.

The three arguments (from left to right) are: signal strength, connected ESSID, and device MAC address. The signal strength is zero to 100. Strength -1 means "unknown." Strength -2 means "disconnected from the wireless network." ESSID and MAC addresses may be "<unknown>." (Available on Windows-CE devices only.)

### **SpeechFromText**

The `SpeechFromText` META tag plays the string specified by the "content" flag.

For example:

```
<meta http-equiv="SpeechFromText" content="I will speak  
this sentence.">
```

## SpeechSetting

The `SpeechSetting` META tag changes one or more speech values.

For example:

The following META tag will change the Text-to-Speech settings for language and voice:

```
<meta http-equiv="SpeechSetting"
content="tts_language=American English, tts_voice=Tom">
```

## TextFromSpeech

The `TextFromSpeech` META tag will play the string specified by the "content" flag. This META tag function is identical to the `SpeechFromText` META tag.

## Symbologies

You can enable and disable different symbologies by using the symbology as the action name, and `Enabled` or `Disabled` as the action type. The symbologies supported by Telnet Client Industrial Browser are as follows:

AUSTRALIA_POSTAL	CUECODE	PLANET
AZTEC	D2OF1ATA	PLESSY
AZTECMESA	D2OF5	POSICODE
BOOKLAND	DATAMATRIX	POSTNET
BRITISH_POSTAL	DUTCH_POSTAL	QRCODE
CANADA_POSTAL	EAN8	RSS14
CHINA_POSTAL	EAN13	RSSEXPANDED
CODABAR	I2OF5	RSSLIMITED
CODABLOCK	JAPAN_POSTAL	SIGNATURE
CODE11	KOREA_POSTAL	TELEPEN
CODE16K	MACROPDF	TLC39
CODE32	MACROMICROPDF	TRIOPTIC39
CODE39	MAXICODE	UCC128
CODE49	MATRIX2OF5	UPCA
CODE93	MICROPDF	UPCE
CODE128	MSI	UPCE0
COMPOSITE	OCR	UPCE1
COUPONCODE	PDF417	WEBCODE

In addition to the preceding symbologies, the value `ALL_DECODERS` can be used to enable or disable all the symbologies.

For example:

To enable only UPCA, use the META tags in this order

```
<meta http-equiv="ALL_DECODERS" content="Disabled">
```

```
<meta http-equiv="UPCA" content="Enabled">
```

The prefix `Scanner_` can also be used with all symbologies.

## Element-Specific Actions

The following META tag options are also supported for individual elements:

- `OnAllKeys`, `OnKey...`, `OnKey0x...`
- `Scanner`
- `Symbologies`

The options can be specified in the tag that creates the element on the web page. If the element is selected (active), then the option will be applied. When the tag is not selected (inactive), then the settings will revert back to those specified by the META tags for the web page.

Unlike the META tags, where `http-equiv` is used to specify the action name and `content` is used to specify the action type, a simple `action_name="action type"` format is used.

For example:

The following tag will cause the Scanner to be enabled when the tag is selected on the web page.

```
<input name="item1" id="item1" type="text"  
Scanner="Enable">
```

The following tag will enable the scanner only while the tag is selected. The scanner will be disabled otherwise.

```
<meta http-equiv="Scanner" content="Disable">
```

---

**NOTE** You can use the META tag `OnStartup` with an action of `IDA_SCAN_ENABLE` or `IDA_SCAN_DISABLE` to change the scanner state only when the page is first loaded.

---

To use element-specific Symbologies, you can either use the Symbology name or prefix the Symbology name with the string `"Scanner_"`.

For example:

The following tag will enable the scanner, AutoTab after an item is scanned, and turn off all Symbologies except `Code128`.

```
<textarea name="item2" Scanner=AutoTab
Scanner_All_Decoders=Disable Scanner_Code128=Enable>
```

The `Code128` enable item must come after the `All_Decoders` item or it will be disabled when the `All_Decoders` item is processed.

## IDA Commands

IDA commands are special values used to invoke a device action, program action, or emulator action within the Telnet Industrial Browser. These values can be specified in many of the special META tags described above, as URLs for the user to click on, or called inside JavaScript functions.

For example:

```
<a href="ida:IDA_SESSION_DISCONNECT">
Close the session</a>
```

-Or-

```
<script language=javascript>
function OnError( )
{
    // Disconnect the Session
    location.href = "ida:IDA_SESSION_DISCONNECT" ;

    // Alternate Method
    document.location = "ida:IDA_SESSION_DISCONNECT" ;
```

```
        // Another Alternate Method
        window.navigate ( "ida:IDA_SESSION_DISCONNECT" ) ;
    }
</script>
```

---

**NOTE** It is recommended that each IDA command be preceded by the `ida` prefix; however, the command will generally work without the prefix.

---

The following are IDA commands supported by the Telnet Industrial Browser:

- IDA\_COLDBOOT
- IDA\_COLDBOOT\_PROMPT
- IDA\_KEYBOARD\_WEB, IDA\_KEYBOARD\_SHOW, or IDA\_KEYBOARD\_UP
- IDA\_KEYBOARD\_NUM or IDA\_KEYBOARD\_NUMERIC
- IDA\_KEYBOARD\_NONE, IDA\_KEYBOARD\_HIDE, or IDA\_KEYBOARD\_DOWN
- IDA\_PROGRAM\_EXIT
- IDA\_PROGRAM\_EXIT\_PROMPT
- IDA\_REPRINT
- IDA\_SCAN\_DISABLE or IDA\_SCAN\_SUSPEND
- IDA\_SCAN\_ENABLE or IDA\_SCAN\_RESUME
- IDA\_SCAN\_FORWARD
- IDA\_SESSION\_S1, IDA\_SESSION\_S2, IDA\_SESSION\_S3, IDA\_SESSION\_S4
- IDA\_SESSION\_DISCONNECT
- IDA\_SESSION\_DISCONNECT\_PROMPT
- IDA\_SESSION\_NEXT



- IDA\_SESSION\_PREVIOUS
- IDA\_SIP\_SHOW or IDA\_SIP\_UP
- IDA\_SIP\_HIDE or IDA\_SIP\_DOWN
- IDA\_SIP\_TOGGLE or IDA\_SIP\_TOGGLEHIDE
- IDA\_SUSPEND or IDA\_SUSPEND\_DEVICE
- IDA\_SUSPEND\_PROMPT
- IDA\_URL\_BACK or IDA\_BACK
- IDA\_URL\_BACK or IDA\_BACK
- IDA\_URL\_BACK\_DISABLE or IDA\_BACK\_DISABLE
- IDA\_URL\_BACK\_ENABLE or IDA\_BACK\_ENABLE
- IDA\_URL\_FORWARD or IDA\_FORWARD
- IDA\_URL\_FORWARD\_DISABLE or IDA\_FORWARD\_DISABLE
- IDA\_URL\_FORWARD\_ENABLE or IDA\_FORWARD\_ENABLE
- IDA\_URL\_HOME or IDA\_HOME
- IDA\_URL\_HOME\_DISABLE or IDA\_HOME\_DISABLE
- IDA\_URL\_HOME\_ENABLE or IDA\_HOME\_ENABLE
- IDA\_URL\_REFRESH or IDA\_REFRESH
- IDA\_URL\_STOP or IDA\_STOP
- IDA\_WARMBOOT
- IDA\_WARMBOOT\_PROMPT
- IDA\_ZOOM\_DISABLE or IDA\_FONT\_DISABLE
- IDA\_ZOOM\_ENABLE or IDA\_FONT\_ENABLE

- IDA\_ZOOM\_LARGER or IDA\_FONT\_LARGER
- IDA\_ZOOM\_LARGEST or IDA\_FONT\_LARGEST
- IDA\_ZOOM\_MEDIUM or IDA\_FONT\_MEDIUM
- IDA\_ZOOM\_MINUS or IDA\_FONT\_MINUS
- IDA\_ZOOM\_PLUS or IDA\_FONT\_PLUS
- IDA\_ZOOM\_SMALLER or IDA\_FONT\_SMALLER
- IDA\_ZOOM\_SMALLEST or IDA\_FONT\_SMALLEST

### **IDA\_COLDBOOT**

This command causes the device to perform a cold boot.

### **IDA\_COLDBOOT\_PROMPT**

This command gives the user the option to perform a cold boot or cancel the action.

### **IDA\_KEYBOARD\_WEB, IDA\_KEYBOARD\_SHOW, or IDA\_KEYBOARD\_UP**

These commands cause the emulation on-screen keyboard to be displayed.

### **IDA\_KEYBOARD\_NUM or IDA\_KEYBOARD\_NUMERIC**

These commands cause the numeric on-screen keyboard to be displayed.

### **IDA\_KEYBOARD\_NONE, IDA\_KEYBOARD\_HIDE, or IDA\_KEYBOARD\_DOWN**

These commands cause the emulation and numeric on-screen keyboards to be hidden.

### **IDA\_PROGRAM\_EXIT**

This command causes the device to exit the current program.

## **IDA\_PROGRAM\_EXIT\_PROMPT**

This command gives the user the option to exit the program or cancel the action.

## **IDA\_REPRINT**

This command causes the last data supplied to the printer to be sent again. The print data will remain available until something else is printed or until the session is disconnected.

## **IDA\_SESSION\_S1, IDA\_SESSION\_S2, IDA\_SESSION\_S3, IDA\_SESSION\_S4**

These commands cause the device to switch to the specified session.

## **IDA\_SCAN\_DISABLE or IDA\_SCAN\_SUSPEND**

These commands disable the bar code scanner. When the bar code scanner is disabled, pressing the mobile device trigger will have no effect.

## **IDA\_SCAN\_ENABLE or IDA\_SCAN\_RESUME**

These commands enable the bar code scanner. The bar code scanner will not scan for bar codes unless the mobile device trigger is pulled.

---

**NOTE** You can use the META tag `OnStartup` with an action of `IDA_SCAN_ENABLE` or `IDA_SCAN_DISABLE` to change the scanner state only when the page is first loaded.

---

## **IDA\_SCAN\_FORWARD**

This command disables the barcode scanner and processes a trigger press as a key press. This command only functions on scanners that support trigger-press forwarding; on all other scanners, the command performs the same action as `IDA_SCAN_DISABLE`.

## **IDA\_SESSION\_DISCONNECT**

This command disconnects the session and closes the Industrial Browser.

**IDA\_SESSION\_DISCONNECT\_PROMPT**

This command gives the user the option to disconnect the session and close the Industrial Browser, or cancel the action.

**IDA\_SESSION\_NEXT**

This command opens a new session.

**IDA\_SESSION\_PREVIOUS**

This command causes the device to return to the previous session.

**IDA\_SIP\_SHOW or IDA\_SIP\_UP**

These commands cause the SIP on-screen keyboard to become visible.

**IDA\_SIP\_HIDE or IDA\_SIP\_DOWN**

These commands cause the SIP on-screen keyboard to become hidden.

**IDA\_SIP\_TOGGLE or IDA\_SIP\_TOGGLEHIDE**

These commands will cause the SIP on-screen keyboard to become visible if it is hidden, or hidden if it is visible.

**IDA\_SUSPEND or IDA\_SUSPEND\_DEVICE**

These commands cause the device to suspend itself.

---

**NOTE** For CE devices, this is similar to pressing the power button.

---

**IDA\_SUSPEND\_PROMPT**

This command gives the user the option to suspend the device or cancel the action.

**IDA\_URL\_BACK or IDA\_BACK**

These commands cause the Industrial Browser to display the screen previous to the current screen. If there are no previous screens, no action will be taken.

---

### **IDA\_URL\_BACK\_DISABLE or IDA\_BACK\_DISABLE**

These commands disable the `Back` menu option so it cannot be selected by the user.

---

**NOTE** The `IDA_URL_BACK` or `IDA_BACK` commands are not affected and will still work.

---

### **IDA\_URL\_BACK\_ENABLE or IDA\_BACK\_ENABLE**

These commands enable the `Back` menu option so it can be selected by the user. The menu option could still be disabled if there is no page to go back to.

### **IDA\_URL\_FORWARD or IDA\_FORWARD**

These commands cause the Industrial Browser to display the screen that was being displayed before the last `Back` command. If there was no previous screen, no action will be taken.

### **IDA\_URL\_FORWARD\_DISABLE or IDA\_FORWARD\_DISABLE**

These commands disable the `Forward` menu option so it cannot be selected by the user.

---

**NOTE** The `IDA_URL_FORWARD` or `IDA_FORWARD` commands are not affected and will still work.

---

### **IDA\_URL\_FORWARD\_ENABLE or IDA\_FORWARD\_ENABLE**

These commands enable the `Forward` menu option so it can be selected by the user.

---

**NOTE** The menu option could still be disabled if there is no page to return to.

---

### **IDA\_URL\_HOME or IDA\_HOME**

These commands cause the Industrial Browser to proceed to the location specified by the current Host Profile. It is completely independent from the `Home` location for any other web browsers on the device.

### **IDA\_URL\_HOME\_DISABLE or IDA\_HOME\_DISABLE**

These commands disable the `Home` menu option so it cannot be selected by the user.

---

**NOTE** The `IDA_URL_HOME` or `IDA_HOME` commands are not affected and will still work.

---

### **IDA\_URL\_HOME\_ENABLE or IDA\_HOME\_ENABLE**

These commands enable the `Home` menu option so it can be selected by the user.

### **IDA\_URL\_REFRESH or IDA\_REFRESH**

These commands cause the web page to be reloaded. The server will be queried to verify that the page contents are up-to-date.

### **IDA\_URL\_STOP or IDA\_STOP**

These commands cause the web page to stop loading. If the web page is already fully loaded, this action has no effect.

### **IDA\_WARMBOOT**

This command causes the device to perform a warm boot.

### **IDA\_WARMBOOT\_PROMPT**

This command gives the user the option to perform a warm boot or cancel the action.

### **IDA\_ZOOM\_DISABLE or IDA\_FONT\_DISABLE**

These commands disable the `Text Size` menu so it cannot be selected by the user.

---

**NOTE** The IDA options to set the zoom level (text size) are not affected and will still work.

---

---

**IDA\_ZOOM\_ENABLE or IDA\_FONT\_ENABLE**

These commands enable the **Text Size** menu so it can be selected by the user.

**IDA\_ZOOM\_LARGER or IDA\_FONT\_LARGER**

These commands cause the Industrial Browser to display the text using a large text size.

---

**NOTE** This is a global setting. Other Telnet sessions, Internet Explorer, and Pocket Internet Explorer will default to using this text size as well.

---

**IDA\_ZOOM\_LARGEST or IDA\_FONT\_LARGEST**

These commands cause the Industrial Browser to display the text using the largest text size supported by the browser.

---

**NOTE** This is a global setting. Other Telnet sessions, Internet Explorer, and Pocket Internet Explorer will default to using this text size as well.

---

**IDA\_ZOOM\_MEDIUM or IDA\_FONT\_MEDIUM**

These commands cause the Industrial Browser to display the text using a medium text size.

---

**NOTE** This is a global setting. Other Telnet sessions, Internet Explorer, and Pocket Internet Explorer will default to using this text size as well.

---

**IDA\_ZOOM\_MINUS or IDA\_FONT\_MINUS**

These commands cause the Industrial Browser to display the text using the next-smaller text size than the current text size.

---

**NOTE** This is a global setting. Other Telnet sessions, Internet Explorer, and Pocket Internet Explorer will default to using this text size as well.

---

**IDA\_ZOOM\_PLUS or IDA\_FONT\_PLUS**

These commands cause the Industrial Browser to display the text using the next-larger text size than the current text size.

---

**NOTE** This is a global setting. Other Telnet sessions, Internet Explorer, and Pocket Internet Explorer will default to using this text size as well.

---

**IDA\_ZOOM\_SMALLER or IDA\_FONT\_SMALLER**

These commands cause the Industrial Browser to display the text using a small text size.

---

**NOTE** This is a global setting. Other Telnet sessions, Internet Explorer, and Pocket Internet Explorer will default to using this text size as well.

---

**IDA\_ZOOM\_SMALLEST or IDA\_FONT\_SMALLEST**

These commands cause the Industrial Browser to display the text using the smallest text size supported by the browser.

---

**NOTE** This is a global setting. Other Telnet sessions, Internet Explorer, and Pocket Internet Explorer will default to using this text size as well.

---



---

## **Appendix A: Wavelink Contact Information**

If you have comments or questions regarding this product, please contact Wavelink Customer Service via e-mail or telephone.

**Email:** [customerservice@wavelink.com](mailto:customerservice@wavelink.com)

**Phone:** 425-823-0111



# Index

## A

about Industrial Browser 4

## B

basic navigation 17

## C

configuring

    Emulation Parameters 7

    Host Profile 7

contact information 39

## D

developing web pages 21

document

    assumptions 3

    conventions 3

## E

Emulation Parameters 7

## H

home page 18

Host Profile

    configuring 7

    HTTP Proxy 8

    HTTPS Proxy 10

## I

IDA commands 32

Industrial Browser

    about 4

    basic navigation 17

    licensing 5

    using 17

introduction 3

## L

licensing 5

## M

META tags 21

## P

printing 24

## S

scanner 25

specifying home page 18

## U

using

    Industrial Browser 17

    WEB Virtual Emulation Keyboard 18

## W

Wavelink contact information 39

web pages

    developing 21

    IDA commands 29

WEB Virtual Emulation Keyboard 18

